

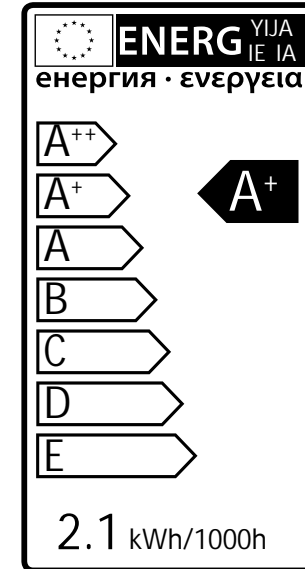


# Alder 3x


2580063

2 Watt      On/Off 5000      Failure < 5% after 1000h  
 120 Lumen      Non dimmable      Failure < 10% after 6000h  
 3000 Kelvin      Instant full light      Flux > 80% after 6000h  
 10.000 Hours      Power factor > 0,5      CRI > 65

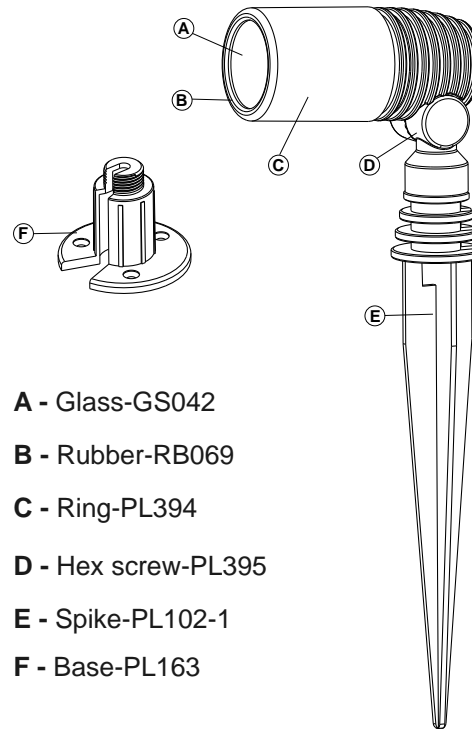


Mr11 LED 2W  
 G4 12V  
 Art. Nr. 6215011


- A - Glass-GS042
- B - Rubber-RB069
- C - Ring-PL394
- D - Hex screw-PL395
- E - Spike-PL102-1
- F - Base-PL163



Main cable 8m SPT-1W with 4 screw outlets



For use with IP44 socket  
 PRI.: 100-240V~50/60Hz □  
 SEC.: 12Vdc Max: 12W  
 IP44 housing



For use with IP44 socket  
 PRI.: 100-240V~50/60Hz □  
 SEC.: 12Vdc Max: 12W  
 IP44 housing

