




Oak 3x

4122603


1 Watt	On/Off 5000	Failure < 5% after 1000h
35 Lumen	Non dimmable	Failure < 10% after 6000h
3000 Kelvin	Instant full light	Flux > 80% after 6000h
10.000 Hours	Power factor > 0,5	CRI > 65

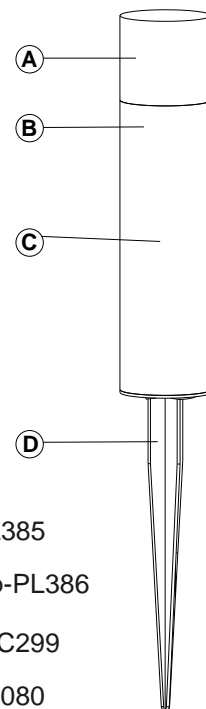


- A - Glass-PL385
- B - Inner cup-PL386
- C - Frame-AC299
- D - Spike-PL080

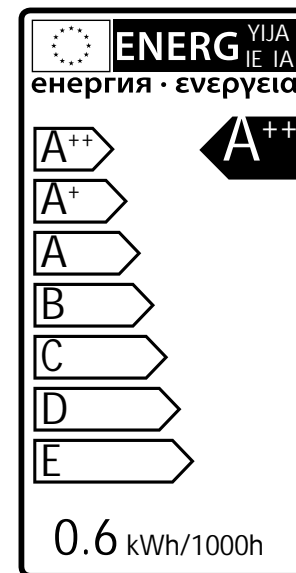


SMD LED unit 3x
12V 1W GU5.3
warm white
Art. nr.1167101



Main cable 8m SPT-1W with 4 screw outlets



For use with IP44 socket
PRI.: 100-240V~50/60Hz □
SEC.: 12Vdc Max: 12W
IP44 housing



For use with IP44 socket
PRI.: 100-240V~50/60Hz □
SEC.: 12Vdc Max: 12W
IP44 housing

